

Serie 180.250




HP 70/250 - KW 51/181

15/42 cm. - 6/17 inc.

3p. Cat II



Mod.	cm. \leftrightarrow inc.	HP min./max.	KW min./max.	N. \updownarrow	kg.	Lbs.
S 2008	200 79	70/250	51/181	8	1800	3960
S 2208	220 87	70/250	51/181	8	1850	4070
S 2508	245 96	75/250	55/181	8	1950	4290
S 2510	245 96	75/250	55/181	10	2100	4620
S 2710	270 106	80/250	58/181	10	2160	4752
S 3010	300 118	90/250	66/181	10	2250	4950
S 3012	300 118	90/250	66/181	12	2400	5280
S 3512	350 138	120/250	88/181	12	2550	5610
S 3514	350 138	120/250	88/181	14	2700	5940
S 4016	400 157	130/250	95/181	16	3210	7062
S 4516	450 177	140/250	102/181	16	3370	7414

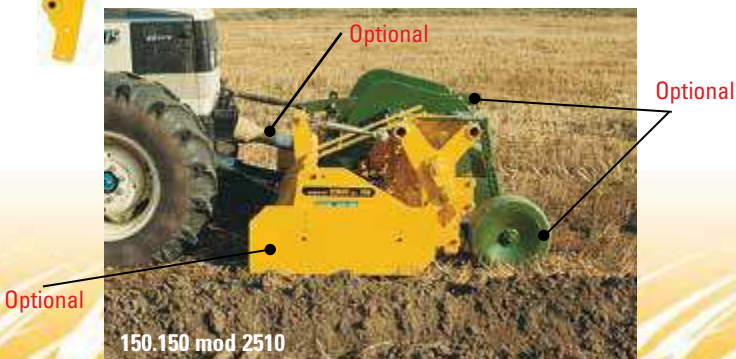

150.150 mod 2510

X p. 11/15